

F25 2U Fixed Patch Panel

V.3.1

Description

FibreFab offers an innovative, robust 2U fixed patch panel. This panel has been designed to accept up to 48 fibres housed within a 2U space.

With the ability to use a full array of adapter types, this panel offers a flexible solution to the end user; enabling them to incorporate a multi functional panel which allows easy access during installation or re-work with no disturbance of the existing cable or fibres.

In the addition to array of adapters the panel also offers multiple cable entry solutions, up to 8 standard entry points for loose tube, tight buffered, pre-terminated and steel tape armoured cable.




Features/Benefits

- ▶ Up to 48 fibres in 2U
- ▶ Multiple adaptor options available
- ▶ 48 adaptor positions
- ▶ Individually labelled ports
- ▶ ROHS, REACH SvHC
- ▶ Fits standard 19"

Applications

- ▶ Data centres, premise installations, telecommunication networks
- ▶ Ethernet, Fibre Channel, ATM, LAN, MAN and WAN
- ▶ Data communication
- ▶ Indoor applications

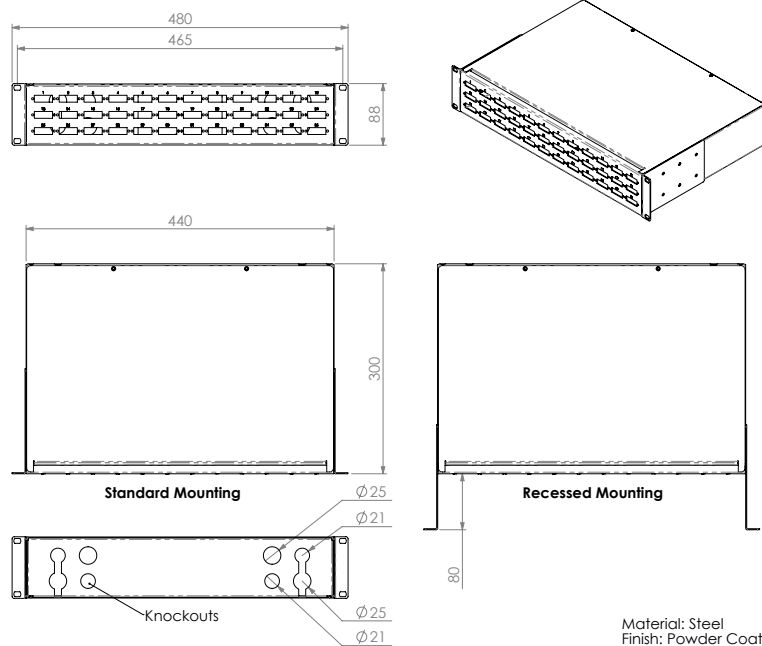

Technical Specification

Element	Characteristic
U Size	2U (88.4mm)
Width	480mm
Depth	300mm
Net weight	4.8 kgs
Packaged weight	5 kgs
Packaged dimensions	530mm W X 11mm H x 330mm D
IP rating	IP20
Suitable for Adaptor type	ST/ FC
Number of ports	48
Cable Entry 21mm	4
Cable entry 25mm	4
Mounting Adjustment range	50mm
Material	Cold- rolled steel
Material thickness	1.2mm
Material coating	Powder coating
Colour	RAL 7035
Operating temperature	-40°c to +50°c
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1
Compliant to	RoHS, Reach/SVHC



+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com